

Key Features

- Simple to use – bed in place just like blocks
- Readily available – no need to cast in-situ
- Reduced labour costs through no on-site casting
- Tough 40N/Sq mm concrete material
- Reduced risk of load transfers crushing blockwork
- Various standard sizes available ex-stock
- Custom requirements catered for

Reduce the risk of crushing blockwork


The performance of our PadStones is achieved by using a high quality 40Newton concrete mix in their manufacture. This ensures that the PadStones are tough enough to carry the load of lintels, joists or RSJs (and the weight transferred through these) and to distribute that weight safely through the blockwork beneath.

Testing Details:


(Cube Testing)

At Killeshal Precast Concrete we take your needs seriously so when we say that our PadStones are manufactured with concrete rated at 40N sq mm we have tested the concrete mix to verify this.

We use Cube Crush Testing for verification and this is obviously particularly appropriate for the intended use of the PadStones

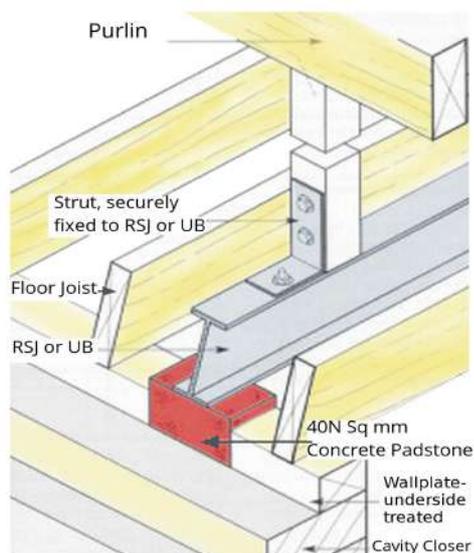

Reduce the risk of crushing blockwork

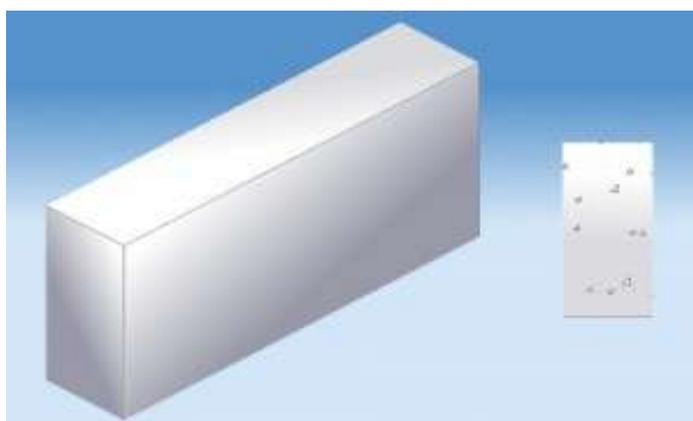

Product ID	Dimensions	Weight*
PS101	215x100x440mm	23.5Kg
PS102	215x100x600mm	31.0Kg
PS103	215x215x440mm	50.0Kg
PS104	215x215x600mm	67.0Kg
PS105	300x215x450mm	70.0Kg
PS106	300x215x600mm	93.0Kg
PS107	450x215x900mm	210.0Kg
PS111	140x215x440mm	32.0Kg
PS112	215x215x665mm	74.0Kg

Product ID	Dimensions	Weight*
PS115	215x215x750mm	83.0Kg
PS116	215x100x665mm	35.0Kg
PS118	215x215x890mm	99.0Kg
PS119	215x100x890mm	46.0Kg
PS123	150x215x450mm	35.0Kg
PS125	440x215x440mm	100.0Kg
PS130	200x215x440mm	45.5Kg

Other sizes and custom configurations available on request; we are always happy to discuss custom requirements. Just ask our Technical Sales Team and they will be happy to assist in design and specification.

*weights are approximate

UK site



UK: Tel 0800 0393367 email info@killeshalprecast.co.uk web www.killeshalprecast.co.uk
Rep. Irl: Tel 057 9353018 email sales@killeshal.com web www.killeshal.com

Rol site




Concrete PadStones





Killeshal manufactures a range of Precast Concrete Padstones to match our extensive range of Lintels. These padstones are stronger than a conventional masonry block, made in 40N/Sq mm concrete mix.

Features and Advantages over In-Situ Casting:


- Simple to use – bed in place just like blocks
- Readily available – standard sizes ex-stock
- Reduced labour costs with no on-site casting
- Tough 40N/Sq mm concrete material
- Reduces risk of lintel load transfers crushing blockwork underneath
- Non-standard sizes / custom requirements can be catered for

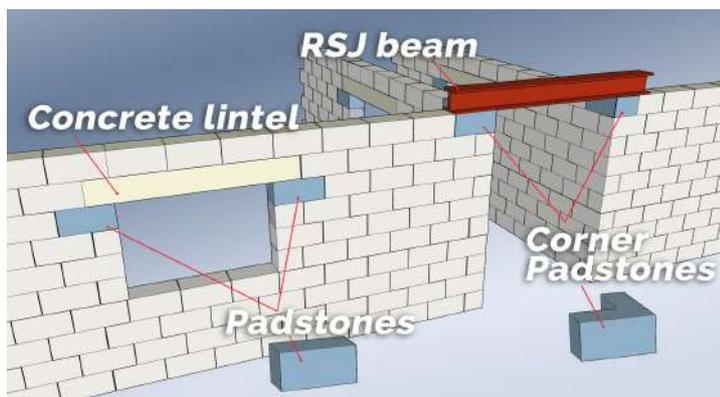


If you have specific off-standard requirements please contact our Technical Sales Team

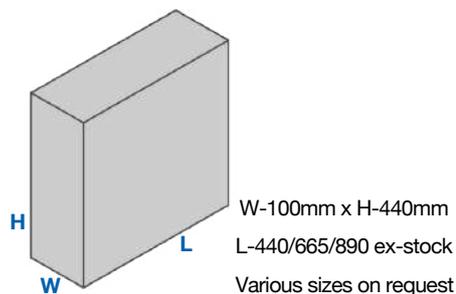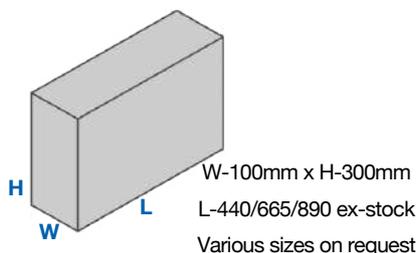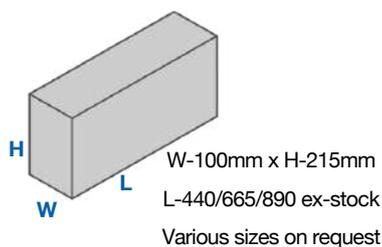


W-215mm x H-215mm
L-440/665/890 ex-stock
Various sizes on request




W-215mm x H-300mm
L-440/665/890 ex-stock
Various sizes on request

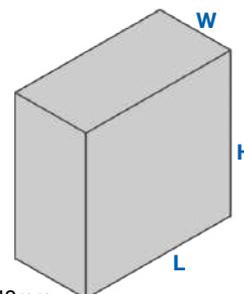


W-215mm x H-440mm
L-440/665/890 ex-stock
Various sizes on request



W-100mm x H-215mm
L-440/665mm ex-stock
Various sizes on request



W-150mm x H-215mm
L-440/665mm ex-stock
Various sizes on request



W-215mm x H-215mm
L-440/665mm ex-stock
Various sizes on request

Our Technical Sales Team are ready to help with advice on specifying the correct PadStone for your application.

UK site



UK: Tel 0800 0393367 email info@killeshalprecast.co.uk web www.killeshalprecast.co.uk
Rep. Irl: Tel 057 9353018 email sales@killeshal.com web www.killeshal.com

Rol site

